



**SANYO**

**Cadnica**

ニカド電池/リサイクル電池  
三洋電機株式会社  
日本製

# Sanyo Cadnica KR-1200SCL Specifications

Sanyo cadnica specification sheet



1

--

•

## Bookmarks

## Quick Links

[Download this manual](#)

[Enlarged version](#)

# Typical Characteristics

# SANYO

# Cadnica

Charge

1.6  
1.5  
1.4  
1.3  
1.2  
0  
2  
4  
6

Charge Time (Hrs.)


Charge

1.6  
1.5  
1.4  
1.3  
1.2  
0  
20  
40  
60

Charge Input (%)

Discharge (at low rate)

1.4  
1.2  
1.0  
0.8

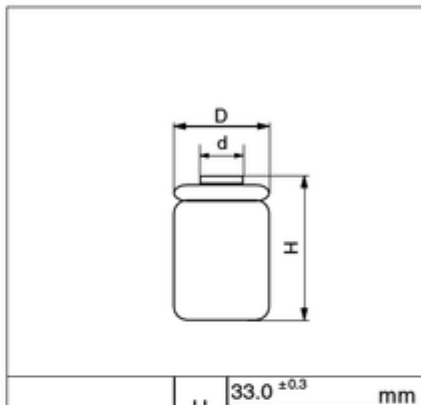

## Cell Type KF

## Specific


Nominal Capacity			
Nominal Voltage			
Charging Current	Standard		
	Quick		
Charging Time	Standard		
	Quick		
Ambient Temperature	Charge	Standard	0
		Quick	0
	Discharge		-20
	Storage		-30
Internal Impedance (Av.) (at 50% discharge)			

(0.5 lt)  
(0.2 lt)  
0.6  
0  
2  
4  
6

# SANYO Cadnica

Discharge Time (Hrs.)

D  
d  
±  
0.3  
33.0  
mm  
H  
±  
0.012  
1.299  
inch  
Dimensions  
±  
0.3  
22.0  
mm  
o f  
D  
±  
0.012  
0.866  
inch  
Bare Cell  
10.0  
mm  
d  
0.394  
inch

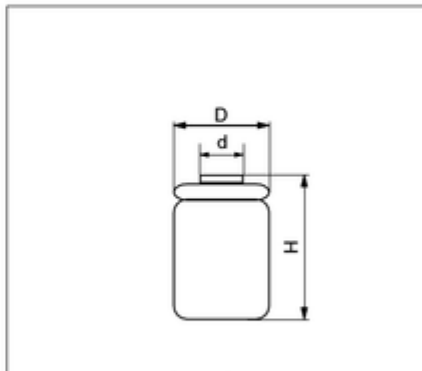


Dimensions of Bare Cell			
H	33.0 ±0.3	mm	
	1.299 ±0.012	inch	
D	22.0 ±0.3	mm	
	0.866 ±0.012	inch	
d	10.0	mm	
	0.394	inch	

## Typical Characteristics


Charge :120mA  
0°C/32°F  
20°C/68°F  
45°C/113°F

### Charge

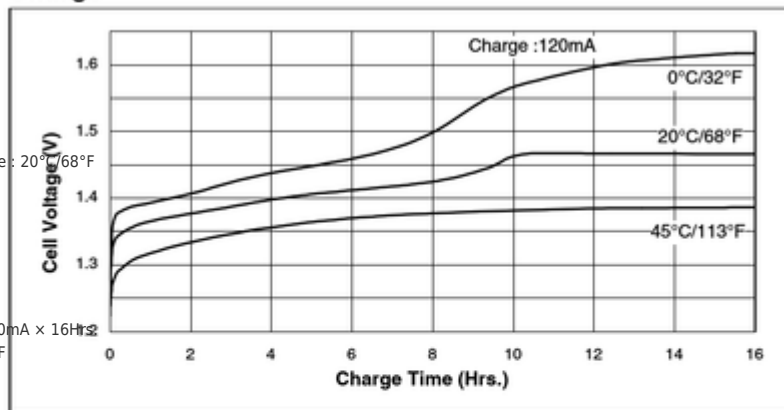

Temperature : 20°C/68°F  
0.2 lt  
0.1 lt  
80  
100  
120  
140  
160  
Charge : 120mA × 16Hrs.  
at 20°C/68°F  
(0.1 lt)

### Charge

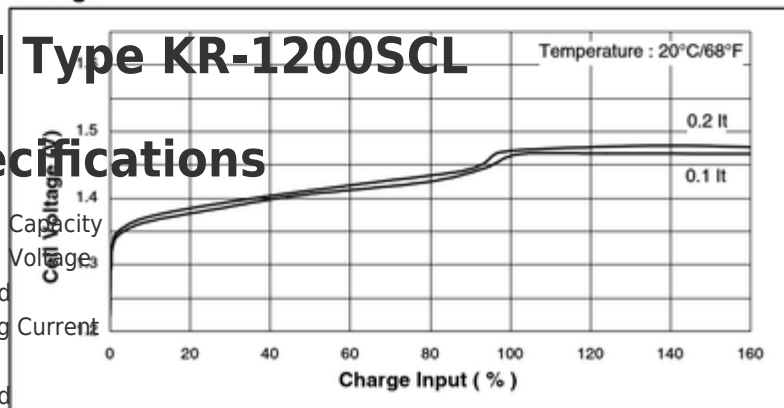


## Cell Type KR-1200SCL

## Specifications

Nominal Capacity  
Nominal Voltage  
Standard  
Charging Current  
Quick  
Standard  
Charging Time  
Quick  
Standard  
Charge  
Quick  
Ambient


### Discharge(at low rate)

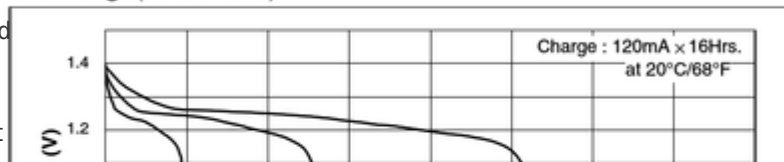


## Cell Type KF Specific

Nominal Capacity		
Nominal Voltage		
Charging Current	Standard	
	Quick	
Charging Time	Standard	
	Quick	
Ambient Temperature	Charge	Standard 0
	Discharge	Quick 0
	Storage	-20
Internal Impedance (Av.) (at 50% discharge)		
Weight		
Dimensions(D)×(H) (with tube)		22 0.


### Discharge(at high rate)

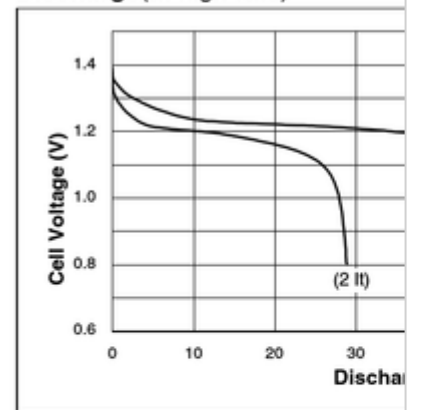

### Discharge(at high rate)

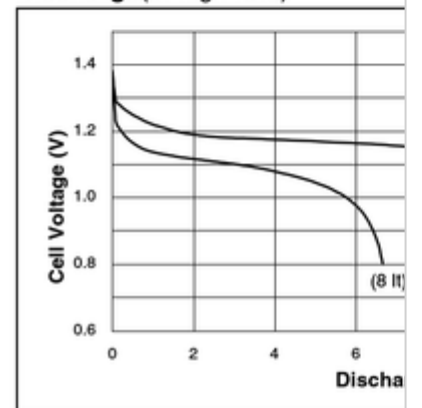

### Temperature(Charge & Discharge)

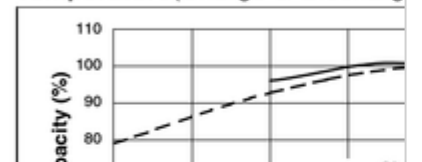



# SANYO Cadnica

Temperature  
Discharge  
Storage  
Internal Impedance (Av.)  
(at 50% discharge)  
Weight  
Dimensions(D)××××(H)  
(with tube)

Discharge(at high rate)

1.4  
1.2  
1.0  
0.8  
0.6  
0  
10  
20




Discharge(at high rate)

1.4  
1.2  
1.0  
0.8  
0.6  
0  
2  
4

Temperature(Charge & Discharge)

110  
100  
90  
80  
70  
60

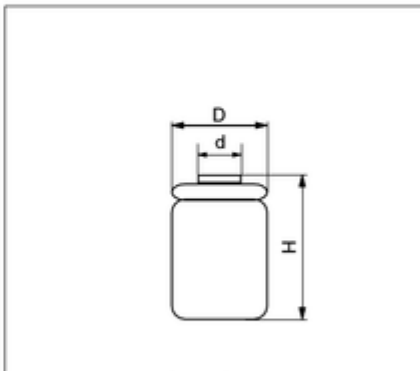

Dimensions of Bare Cell			
H		33.0 ±0.3	mm
		1.299 ±0.012	inch
D		22.0 ±0.3	mm
		0.866 ±0.012	inch
d		10.0	mm
		0.394	inch

Condition

50  
40  
30  
-20  
-10  
0  
-4  
14  
32

Operating Temperature

1200mAh  
1.2V  
120mA  
240mA  
14 to 16Hrs.  
7 to 8Hrs.

0

°C to

+45

°C [

+32

°F to

0

°C to +45

°C [

+32

°F to

-20

°C to +60

°C [

-4

°F to

-30

°C to +50

°C [

-22


°F to

9.7


mΩ

## Typical Characteristics


Charge

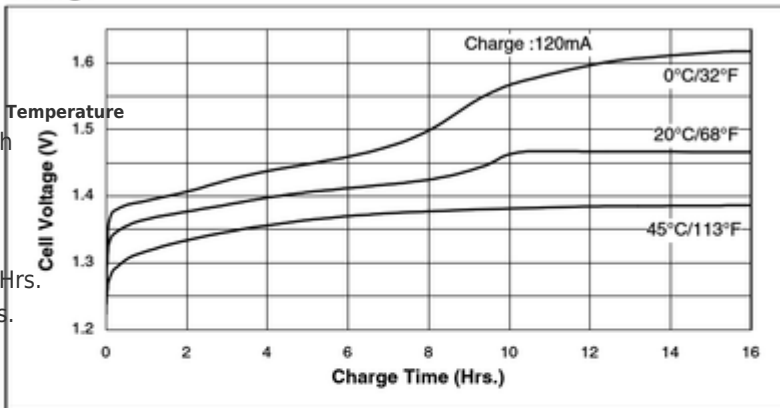

Charge

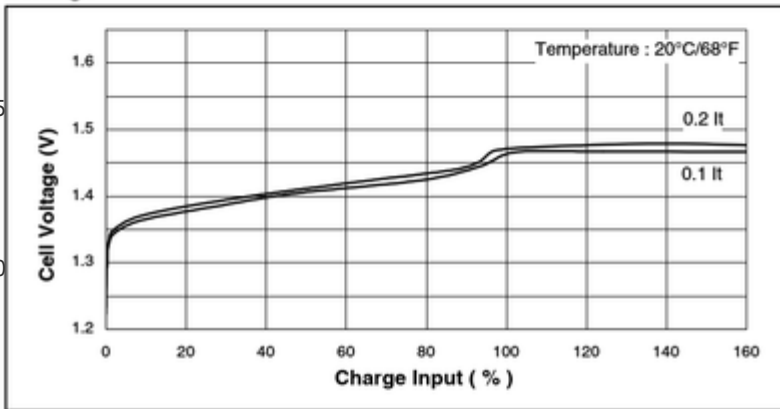


Discharge(at low rate)

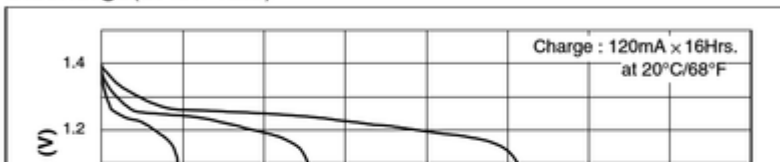


## Cell Type KF Specific

Nominal Capacity		
Nominal Voltage		
Charging Current	Standard	
	Quick	
Charging Time	Standard	
	Quick	
Ambient Temperature	Charge	Standard 0
		Quick 0
	Discharge	-20
	Storage	-30
Internal Impedance (Av.) (at 50% discharge)		
Weight		
Dimensions(D)×(H) (with tube)		22 0.


Discharge(at high rate)

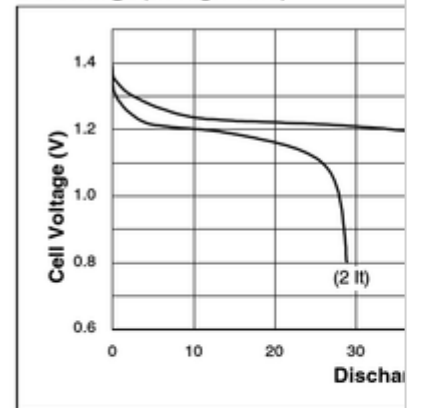

Discharge(at high rate)

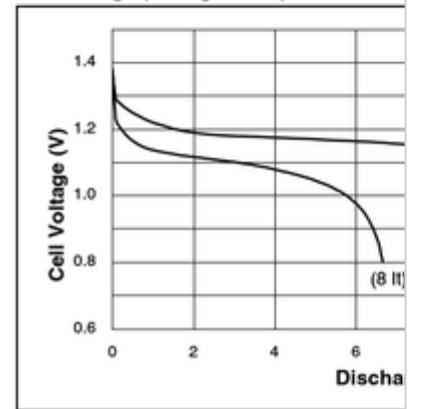

Temperature(Charge & Discharge)

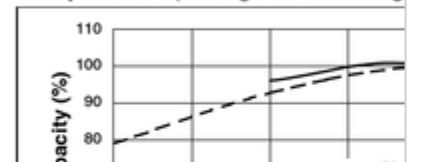

(at 1000Hz)

37 1.31

OZ

g/

0

22.9

34.0

-1

-1.2

0

0.90

1.34

-0.04

-0.05

Charge : 120mA x 16Hrs.

at 20°C/68°F

(2 It)

(1 It)

30

40

50

60

70

Discharge Time (Mins)

Charge : 120mA x 16Hrs.

at 20°C/68°F

(4 It)

(8 It)

6

8

10

12

14

16

18

20

22

24

26

28

30

32

34

36

38

40

42

44

46

48

50

52

54

56

58

60

62


64

66

68

70

# SANYO Cadnica

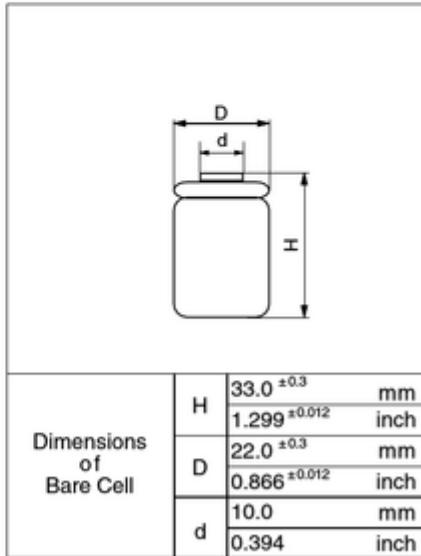

Dimensions  
of  
Bare Cell

H	33.0 ±0.3	mm
	1.299 ±0.012	inch
D	22.0 ±0.3	mm
	0.866 ±0.012	inch
d	10.0	mm
	0.394	inch

## Cell Type KF Specific

Nominal Capacity		
Nominal Voltage		
Charging Current	Standard	
	Quick	
Charging Time	Standard	
	Quick	
Ambient Temperature	Charge	Standard 0
		Quick 0
	Discharge	-20
	Storage	-30
Internal Impedance (Av.) (at 50% discharge)		
Weight		
Dimensions(D)×(H) (with tube)		22 0.

### Typical Characteristics

Discharge Time (Mins)

Charge Characteristics

Discharge Characteristics

Charge Characteristics

Discharge Characteristics

Charge Characteristics

Discharge Characteristics

Charge Characteristics

Discharge Characteristics

Charge Characteristics

Discharge Characteristics

Charge Characteristics

Discharge Characteristics

Charge Characteristics

Discharge Characteristics

Charge Characteristics

Discharge Characteristics

Charge Characteristics

Discharge Characteristics

Charge Characteristics

Discharge Characteristics

Charge Characteristics

Discharge Characteristics

Charge Characteristics

Discharge Characteristics

Charge Characteristics

Discharge Characteristics

Charge Characteristics

Discharge Characteristics

Charge Characteristics

Discharge Characteristics

Charge Characteristics

Discharge Characteristics

Charge Characteristics


Discharge Characteristics

Charge Characteristics


Discharge Characteristics

Charge Characteristics


### Charge

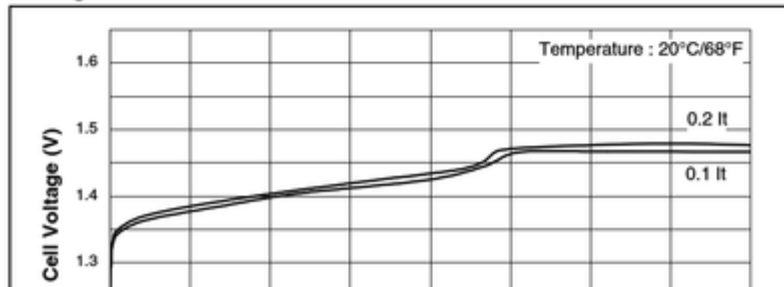

### Discharge(at high rate)

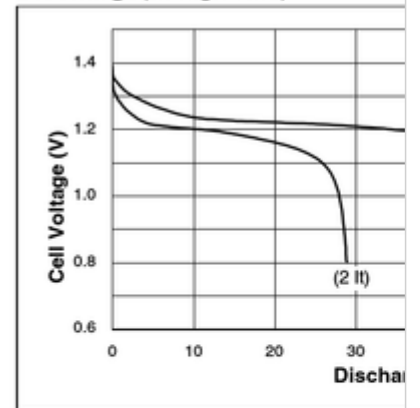

### Discharge(at high rate)

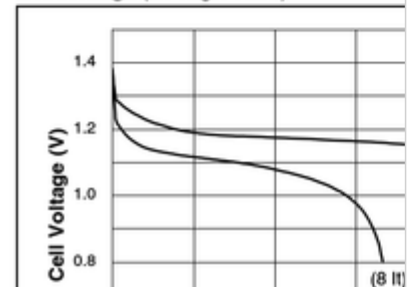

CD010830

## Related Manuals for Sanyo Cadnica KR-1200SCL

[Camera Accessories Sanyo KR-1000SCL Cadnica Specifications](#)

Sanyo battery charger specification sheet (1 page)

[Camera Accessories Sanyo KR-1100AAU Cadnica Specifications](#)

Sanyo battery charger specification sheet (1 page)

[Camera Accessories Sanyo KR-1100AEL Cadnica Specifications](#)

Sanyo battery charger specification sheet (1 page)

[Camera Accessories Sanyo KR-1200AAE Specifications](#)

Sanyo battery charger specification sheet (1 page)

[Camera Accessories Sanyo KR-1400AE Cadnica Specifications](#)

Sanyo battery charger specification sheet (1 page)

[Camera Accessories Sanyo KR-1500AUL Cadnica Specifications](#)

Sanyo battery charger specification sheet (1 page)

[Camera Accessories Sanyo KR-1500SC Cadnica Specifications](#)

Sanyo battery charger product manual (1 page)

[Camera Accessories Sanyo KR-1500SCT Cadnica Specifications](#)

Sanyo battery charger specification sheet (1 page)

[Camera Accessories Sanyo KR-1700AU Cadnica Specifications](#)

Sanyo battery charger specification sheet (1 page)

[Camera Accessories Sanyo KR-1800SCE Cadnica Specifications](#)

Sanyo battery charger specification sheet (1 page)

[Camera Accessories Sanyo Cadnica KR-1200AUL Specifications](#)

Sanyo cadnica specification sheet (1 page)

[Camera Accessories Sanyo N-270AA Cadnica Specifications](#)

Sanyo battery charger specification sheet (1 page)

[Camera Accessories Sanyo Cadnica KR-600AAL Specifications](#)

Sanyo battery specification sheet (1 page)

[Camera Accessories Sanyo CR17335 Specifications](#)

Sanyo lithium specification sheet (1 page)

[Camera Accessories Sanyo N-1250SCRL Cadnica Specifications](#)

Sanyo battery charger specification sheet (1 page)

[Camera Accessories Sanyo N-100AAS Cadnica Specifications](#)

Sanyo battery charger specification sheet (1 page)