



Sanyo PDG-DWL2000 Specifications

Ultra short throw projector

1
2

--

•

Bookmarks

[Download this manual](#)


Quick Links




Enlarged version

Throw Distance

PDG-DWL2500

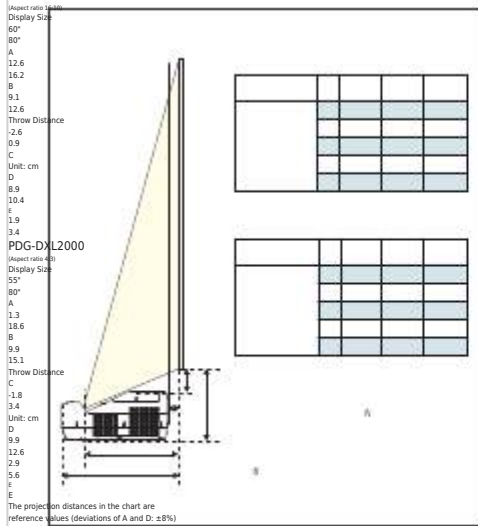

PDG-DXL2000

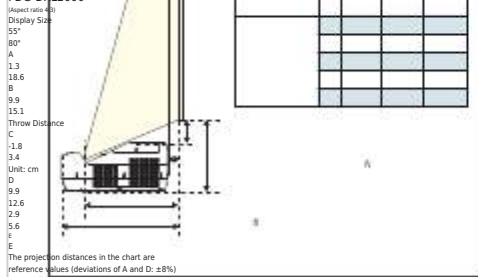

The projection distances in the chart are reference values (deviations of A and D, ±8%) based on lens design specifications. Since there may be a certain deviation in individual lenses, use the actual product and project images by referring to the projection distance chart.

Screen that images are projected in is appropriate size.

Terminals

PDG-DWL2500/DXL2000
WXGA 2500lm/XGA 2000

Specifications

Product Number

PDG-DWL2500

PDG-DXL2000

System

Chipset 3-chip system (8-segment)

Size

16.65 inch type, aspect ratio 16:10

15.5 inch type, aspect ratio 4:3

Chipset 3-chip

Light Source

275 W

Screen Size

Minimum 60 inch - Maximum 110 inch

Minimum 55 inch - Maximum 90 inch

110"

Color Reproducibility

Full color (10.7 billion colors)

*1

Brightness

2,500 lumens

2,000 lumens

21.5

Contrast

*1

2,000:1

Speaker

10 W Mono

17.9

Scanning Frequency

Horizontal 15 kHz

6.3

Consumers 480p, 576p, 720p (50/60), 1080i (50/60)

HDTV signals

HDMI 480p, 576p, 720p (50/60), 1080p (50/60)

Signal

12.8

Input

Computer

(WXGA / XGA / SXGA / SXGA+ / WWSGA / WWSGA+ / WXGA / SXGA / WWSGA / WWSGA+)

5.8

Compatibility

XGA / SXGA / WWSGA / WWSGA+

XGA / SXGA / WWSGA / WWSGA+

HDMI v.1.3 Digital signal input, HDMI v.1.3 with Deep Color

Computer

D-sub15 v.1.1 (RGB) input (computer input with conversion cable)

D-sub15 v.1.1 (RGB) input (RGB input or monitor out)

Video

XGA v.1.3 Compatible video, Mini-DIN 4-pin, S-Video

Mini-jack (Stereo) x 2, Input (for Computer, 2)

9P

Terminals

DIN4 (R, L, mono) x 1, Input (for Video)

Mini-jack (Stereo) x 1, Output (variable audio out)

20.7

WLAN v.1, Wireless LAN

17.2

Communication

D-sub 15pin v.1.1, RS-232C

Mini-DIN 4-pin, RS-232C OUT

5.6

Operating temperature

5 to 40 °C

13.6

Power Source

100 V - 120 V AC, 200 V - 240 V AC

Dimensions (W x H x D)

*2

12.6 x 6.7 x 15.2 inch

6.6

Power consumption

100 V - 120 V AC, 120 W / 400 W

100 V - 240 V AC, 100 W / 375 W

100 V - 120 V AC, 0.4 W / 10.3 W

Standby Power consumption

100 V - 240 V AC, 0.85 W / 11.5 W

Weight

13.7 lbs

Removable power cord x 1, D-sub 15 cable x 1, PPI color calibration kit

Main Accessories

Owner's manual (Quick Manual & CD-ROM)

Remote control x 1 (AAA battery x 1)

*1: Measurement taken from the center of the screen

*2: When Lamp Mode is set to Eco Mode

Measurement taken from the center of the screen

*3: Not included in the package

*4: For product information, please visit the website of the manufacturer

*5: Microsoft, Windows, and Windows Vista are registered trademarks of Microsoft Corp. in the United States and/or other countries.

*6: Product names and company names are trademarks or registered trademarks of their respective companies.

Remote control

SANYO Presentation Technologies

888-337-1215 www.sanyoprojectors.com

Toll free:

©

2010 SANYO North America Corporation.

Ultra Short Throw Projector

The World's Shortest Throw and a 3D-Ready

Expand Projector Possibilities

PDG-DWL2500

PDG-DXL2000



SANYO



ManualsLib.com

ManualsLib.com

PDG-DWL2500

PDG-DXL2000

W XGA

XGA



[Next Page](#)

1

2

Related Manuals for Sanyo PDG-DWL2000

[Projector SANYO PDG-DXL2000 Owner's Manual](#)

Multimedia projector (142 pages)

[Multimedia projector Sanyo PDG-DXL2000 Service Manual](#)

(98 pages)

[Projector Sanyo PDG-DWL2500 Service Manual](#)

(98 pages)

[Projector Sanyo PDG-DWL2500 Owner's Manual](#)

Sanyo projector user manual (82 pages)

[Projector Sanyo PDG-DWL2500 - 2500 Lumens Functional Specifications](#)

Expand series command functional specifications (73 pages)

[Projector Sanyo PDG-DXL2000 - 2000 Lumens Specifications](#)

Expand serial command functional specifications (73 pages)

[Projector Sanyo PDG-DXL2000 Network Manual](#)

Sanyo projector user manual (60 pages)

[Projector Sanyo PDG-DWL2500 - 2500 Lumens Owner's Manual](#)

Network set-up and operation (60 pages)

[Projector Sanyo PDG-DWL2500 - 2500 Lumens Specifications](#)

Basic serial command specifications (25 pages)

[Projector Sanyo PDG-DXL2000 - 2000 Lumens Specifications](#)

Basic serial command specifications (25 pages)

[Projector Sanyo PDG-DXL2000 Maintenance And Cleaning](#)

(5 pages)

[Projector Sanyo PDG-DWL2500 Dimensional Drawing](#)

Sanyo projector dimensional drawing (1 page)

[Projector Sanyo PDG-DWL2500 - 2500 Lumens Specifications](#)

2500/2000 lumens wxga/xga ultra short throw projector (1 page)

[Projector Sanyo PDG-DXL2000S Specifications](#)

Print specs (1 page)

[Projector Sanyo PDG-DWL2500 Specifications](#)

Wxga/xga ultra short throw projector (1 page)

[Projector Sanyo PDG-DWL100 Quick Reference Manual](#)

Sanyo pdg-dwl100: quick start (21 pages)

Summary of Contents for Sanyo PDG-DWL2000

[Page 1](#) Removable power cord x 1, D-sub 15 cable x 1, PIN code-locking seal, Owner's manual (Quick Manual & CD-ROM), Remote control x 1 (AAA battery x 2) Remote control SANYO Presentation Technologies 888-337-1215 www.sanyoprojectors.com Toll free: © 2010 SANYO North America Corporation. PDG-DWL2500 PDG-DXL2000 PDG-DWL2500 PDG-DXL2000 W XGA 2500 lm 2000 lm...

[Page 2](#) 10 W speaker Along with its mobility, this projector features a high-output 10 W speaker that delivers enough audio authority for this projector to be used in conference rooms, classrooms, and other spaces without the need for a separate audio system.

This manual is also suitable for:

[Pdg-dwl2500Pdg-dxl2000](#)