



Sanyo VA-DK02 Instruction Manual

In-ceiling bracket

1

--

•

Bookmarks

[Download this manual](#)

Quick Links

INSTRUCTION MANUAL

BHL_WA_E 07.11.16 3:18 PM ページ 1

In-ceiling bracket

VA-DK02

INSTRUCTION MANUAL

Before starting the installation procedure, please read these instructions carefully. Make sure to keep these instructions handy for future reference.

Warning

■ Safety Precautions

WARNING

When installing the bracket and camera, please read these instructions carefully. Make sure to keep these instructions handy for future reference.

■ Safety Precautions

When installing the bracket and camera, select a surface which is flat and durable and which can support the full weight of the bracket and camera, and make sure that they are installed securely.

WARNING This indicates a point that if not respected may cause death or serious injuries.

If the installation location is plasterboard or a similar material, use a reinforcement plate to reinforce it.

If the bracket and camera are not securely installed, they may fall down.

When installing the bracket and camera, select a surface which is flat and durable and which can support the full weight of the bracket and camera, and make sure that they are installed securely.

If the installation location is plasterboard or a similar material, use a reinforcement plate to reinforce it.

If the bracket and camera are not securely installed, they may fall down.

CAUTION This indicates a point that if not respected may cause injuries and/or extensive material damage.

CAUTION This indicates a point that if not respected may cause injuries and/or extensive material damage.

When installing the bracket and camera, always be sure to check that they are fully secure. If the bracket

and camera fall down, serious injury may result.

When installing the bracket and camera, always be sure to check that they are fully secure. If the bracket

and camera fall down, serious injury may result.

■ Accessories

Accessories

- ① Screws: 4 (M4×10 mm)
- ② Spacers: 4 (12 mm), 3 (22 mm)
- ③ Safety wires: 2 (M4×10 mm)
- ④ (12 mm), 3 (22 mm)
- ⑤ Screws: 2



■ Specifications

Specifications

Weight: 550 g

Dimensions (Unit: mm): 230×105 (H)

Dimensions (Unit: mm): 230×105 (H)

Dimensions (Unit: mm): 230×105 (H)

Mounting board thickness range: 5 - 30 mm

Features and specifications are subject to change without prior notice or obligations.



■ Installation method

Make a hole with a diameter of 200 mm

1

in the ceiling, install the hook of the accessory safety wire (A) into the hooking hole (B) of the bracket, and then install the other end of the safety wire (A) to a point inside the ceiling.


If the safety wire is too short, use the other safety wire which is also included as an accessory. The safety wire is used to prevent the bracket from falling down once it has been installed.

If the installation location is not strong enough, reinforce the ceiling, or install the anchor bolt (Y).

2

Install the bracket to the ceiling, and then use a screwdriver to fully tighten both of the screws (C).

Secure the ceiling surface with the bracket (D).

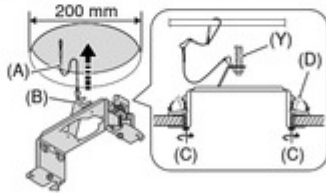


■ Installation method

1 Make a hole with a diameter of 200 mm in the ceiling, install the hook of the accessory safety wire (A) into the hooking hole (B) of the bracket, and then install the other end of the safety wire (A) to a point inside the ceiling.

- If the safety wire is too short, use the other safety wire which is also included as an accessory. The safety wire is used to prevent the bracket from falling down once it has been installed.
- If the installation location is not strong enough, reinforce the ceiling, or install the anchor bolt (Y).

2 Install the bracket to the ceiling, and then use a screwdriver to fully tighten both of the screws (C). Secure the ceiling surface with the bracket (D).

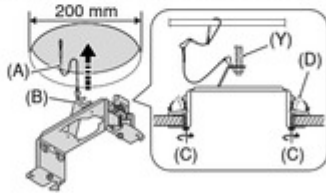

INSTRUCTION MANUAL

In-ceiling bracket

VA-DK02

When installing the bracket and camera, please read these instructions carefully. Make sure to keep these instructions handy for future reference.

When installing the bracket and camera, please read these instructions carefully. Make sure to keep these instructions handy for future reference.



WARNING

When installing the bracket and camera, please read these instructions carefully. Make sure to keep these instructions handy for future reference.


When installing the bracket and camera, please read these instructions carefully. Make sure to keep these instructions handy for future reference.



3 Install the camera. Four types of camera can be installed to this bracket.

A Installing the vandal resistant dome camera


Place the camera into the In-ceiling bracket, and then secure it by tightening the four supplied screws.



4

B Installing the pan-focus indoor mini dome camera


Remove the basement (Z) from the camera bottom, secure it by tightening the two supplied screws and then install the mini dome camera to it.

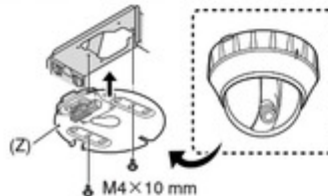

5

C Installing the vari-focal indoor mini dome camera

Remove the basement (Z) from the camera bottom, install the accessory spacer (E: 12mm) to it, secure it by tightening the four supplied screws and then install the mini dome camera to it.

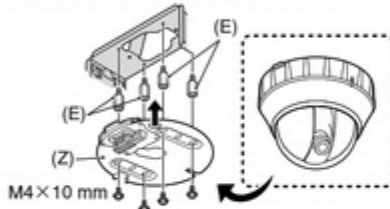

!

D Installing the vandal resistant mini dome camera

Install the three spacers (F: 22 mm) which are supplied with the In-ceiling bracket, install the camera into the In-ceiling bracket, and then secure it by tightening the three supplied screws.

Be sure to remove the rubber cushion on the base of the mini dome camera.



3 Install the camera. Four types of camera can be installed to this bracket.

A Installing the vandal resistant dome camera

Place the camera into the In-ceiling bracket, and then secure it by tightening the four supplied screws.



Four types of camera can be installed to this bracket.

A

Installing the vandal resistant dome camera

Place the camera into the In-ceiling bracket, and then secure it by tightening the four supplied screws.

M4×10 mm

Installing the pan-focus indoor mini dome camera

Remove the basement (Z) from the camera

Remove the basement (Z) from the camera bottom, secure it by tightening the two supplied screws and then install the mini dome camera to it.

(Z)

M4×10 mm

Read these instructions carefully. Make sure to read these instructions before installation. Instructions handy for future reference.

Remove the basement (Z) from the camera bottom, install the accessory spacer (E: 12mm) to it, secure it by tightening the four supplied screws and then install the mini dome camera to it.

WARNING This indicates a point that if not respected may cause death or serious injuries.

When installing the bracket and camera, select a surface which is flat and durable and which can support the weight of the bracket and camera, and make sure that they are installed securely.

If the installation location is plasterboard or a similar material, use a reinforcement plate to reinforce it. If the ceiling and camera are not securely installed, they may fall down.

CAUTION This indicates a point that if not respected may cause death or extensive material damage.

When installing the bracket and camera, always be sure to check that they are fully secure. If the bracket falls down, serious injury may result. Be sure to remove the rubber cushion from the mini dome camera.

Specifications

Dimensions (Unit: mm): 230×105 (H)
Weight: 1.2 kg (2.6 lb)
Screws: 4 (M4×10 mm), 3 (22 mm)

Parts: 2

Insert the hook of the safety wire which is attached to the cover into the hooking hole (C) of the In-ceiling bracket.

Push both hooks (H) of the cover, and

align the cover with the ceiling hooking hole (C) and secure it. Specifications are subject to change without notice.

When installing the cover to the ceiling, the hook of the safety wire may become clamped between the hooks (H) and the hooks (H) may open. If the hooks (H) are open when the cover is installed, the cover may fall down.

SANYO Electric Co., Ltd.
Printed in Taiwan




3 Install the camera.

Four types of camera can be installed to this bracket.

A Installing the vandal resistant dome camera


Place the camera into the In-ceiling bracket, and then secure it by tightening the four supplied screws.



4

B Installing the pan-focus indoor mini dome camera


Remove the basement (Z) from the camera bottom, secure it by tightening the two supplied screws and then install the mini dome camera to it.

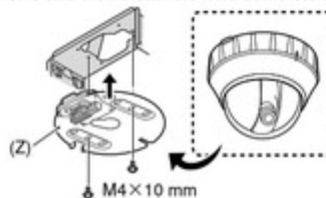

5

C Installing the vari-focal indoor mini dome camera

Remove the basement (Z) from the camera bottom, install the accessory spacer (E: 12mm) to it, secure it by tightening the four supplied screws and then install the mini dome camera to it.

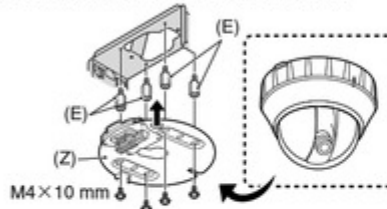

!

D Installing the vandal resistant mini dome camera

Install the three spacers (F: 22 mm) which are supplied with the In-ceiling bracket, install the camera into the In-ceiling bracket, and then secure it by tightening the four supplied screws.


Installation method

1 Make a hole with a diameter of 200 mm in the ceiling, install the hook of the accessory safety wire (A) into the hooking hole (B) of the bracket, and then install the other end of the safety wire (A) to a point inside the ceiling.

- If the safety wire is too short, use the other safety wire which is also included as an accessory. The safety wire is used to prevent the bracket from falling down once it has been installed.
- If the installation location is not strong enough, reinforce the ceiling, or install the anchor bolt (Y).

2 Install the bracket to the ceiling, and then use a screwdriver to fully tighten both of the screws (C).

Secure the ceiling surface with the bracket (D).

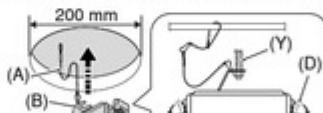

Related Manuals for Sanyo VA-DK02

[TV Mount Sanyo VA-60BX Instruction Manual](#)

Base bracket (1 page)

[TV Mount Sanyo VA-85BX Instruction Manual](#)

Base bracket (1 page)

[TV Mount Sanyo VA-DK03 Instruction Manual](#)

In-ceiling bracket (2 pages)