



Sanyo DCA M15 Service Manual

Integrated stereo amplifier

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18

19
20
21
22
23
24
25
26
27

•

Bookmarks

[Download this manual](#)

Quick Links



SERVICE MANUAL

INTEGRATED

STEREO AMPLIFIER SERVICE MANUAL

e Sanur

NOTE:


The photo on the cover shows the unit with a "SILVER" front panel. The "BLUE" version is identical in all respects.

NOTE:

The below mentioned specifications are mainly based on the IHF measurements standard.

They can

INTEGRATED STEREO AMPLIFIER

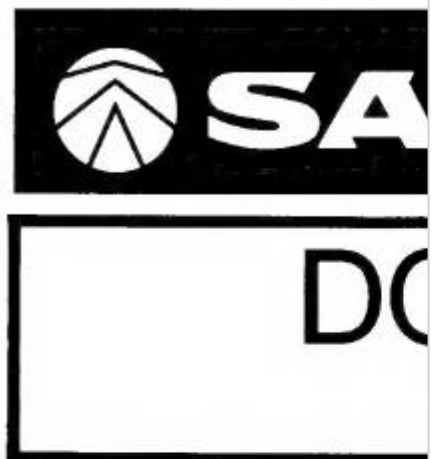

therefore
 not to be compared
 directly with
 specifications

Service SANYO



DCA-M15 INTEGRATED STEREO AMPLIFIER (EUROPE)

SPECIFICATIONS

Specifications based on the DIN standard or other standards.

POWER AMPLIFIER SECTION

Minimum
 RMS sine wave power
 per channel, no more than
 stated distortion and with
 8-ohm load at 1 kHz (DIN)
 Total Harmonic Distortion
 |M. Distortion
 Speaker Damping

PREAMPLIFIER SECTION

Frequency Response
 Phono (RIAA)
 Aux (+10 dB)
 Microphone (+3 dB)
 Input Sensitivity/Impedance
 Phono
 Tuner
 Aux
 Tape
 Microphone
 Phono Max. Input Capability



NOTE:

The photo on the cover shows the unit with a "SILVER" front panel. The "BLUE" version is identical in all respects.

45 Watts
 0.09 %
 0.09 %
 > 25
 +0.5dB

20 Hz — 20 kHz
 70 Hz — 4.5 kHz
 2.5 mV/50 kohms

NOTE:

The below mentioned specifications are mainly based on the IHF measurements standard.

They can therefore not be compared directly with specifications based on the DIN standard or other standards.

150 mV/50 kohms
 150 mV/50 kohms
 150 mV/50 kohms
 1.5 mV/7 kohms
 120 mV

POWER AMPLIFIER SECTION

50 Hz
 +12 dB
 Minimum RMS sine wave power
 per channel, no more than
 stated distortion and with

SPECIFICATIONS

Graphic Equalizer
 50 Hz
 250 Hz
 1 kHz

250 Hz
+12 dB
1 kHz
+12 dB
4.5 kHz
+12 dB
15 kHz
+12 dB

SERVICE MANUAL

Hum and Noise (IHF Short Circuit,
A Network)

Phono

72 dB

Tuner

80 dB

Aux

80 dB

Tape

80 dB

Microphone

64 dB

GENERAL

Power Requirements

AC: 110/220V, 50 Hz

Power Consumption

296 W

Dimensions (W x H x D)

335 x 108 x 257 mm

Weight (approx.)

5 kg

—Specifications are subject to change without notice.—

WM-9144



[Next Page](#)

1
2
3
4
5

Related Manuals for Sanyo DCA M15

[Amplifier Sanyo DCA M15 Service Manual](#)

(8 pages)

[Amplifier Sanyo DCA 205 Service Manual](#)

(13 pages)

[Amplifier Sanyo DCA 401 Owner's Manual](#)

(11 pages)

[Amplifier Sanyo DCA 200UM Service Manual](#)

(10 pages)

[Amplifier Sanyo DCP3001SEV Service Manual](#)

Stereo power amplifier (12 pages)

[Amplifier Sanyo JA 20 Service Manual](#)

(8 pages)

[Amplifier Sanyo JA 224 Service Manual](#)

(7 pages)

[Amplifier Sanyo JA 5503 Service Manual](#)

(10 pages)

[Amplifier Sanyo JA20 Service Manual](#)

(8 pages)

[Amplifier Sanyo SUPER BL P5 Manual](#)

(354 pages)

[Amplifier Sanyo JA 226 Service Manual](#)

(10 pages)

[Amplifier Sanyo JA 250 Service Manual](#)

(9 pages)

[Amplifier Sanyo PLUS P20 Service Manual](#)

Stereo power amplifier (8 pages)

[Amplifier Sanyo JA 300 Service Manual](#)

(8 pages)

[Amplifier Sanyo JA 566 BLACK Service Manual](#)

(8 pages)

[Amplifier Sanyo JA 477 Service Manual](#)

(8 pages)

Related Products for Sanyo DCA M15

[Sanyo DCA 205](#)

[Sanyo DCA 401](#)

[Sanyo DCA 200UM](#)

[Sanyo DCP3001SEV](#)

[Sanyo DC-AVD8501](#)

[Sanyo DC-AX20](#)

[Sanyo DC-AS1600DX](#)

[Sanyo DC-AS1600DXE](#)

[Sanyo DC-AS1600DX/XE](#)

[Sanyo DC-MM5000 \(XE\)](#)

[Sanyo DC-MP7500\(SL\)/\(XE\)](#)

[Sanyo DC-MCR60](#)

[Sanyo DC-F380](#)

[Sanyo DC-X850](#)

[Sanyo DC-S300](#)

[Sanyo DC-F170](#)