





## Toshiba ST-B10 SERIES Quick Installation Manual

Pos terminal



1  
2  
3  
4  
5  
6

--


•

Bookmarks

--

[Download this manual](#)

### Quick Links

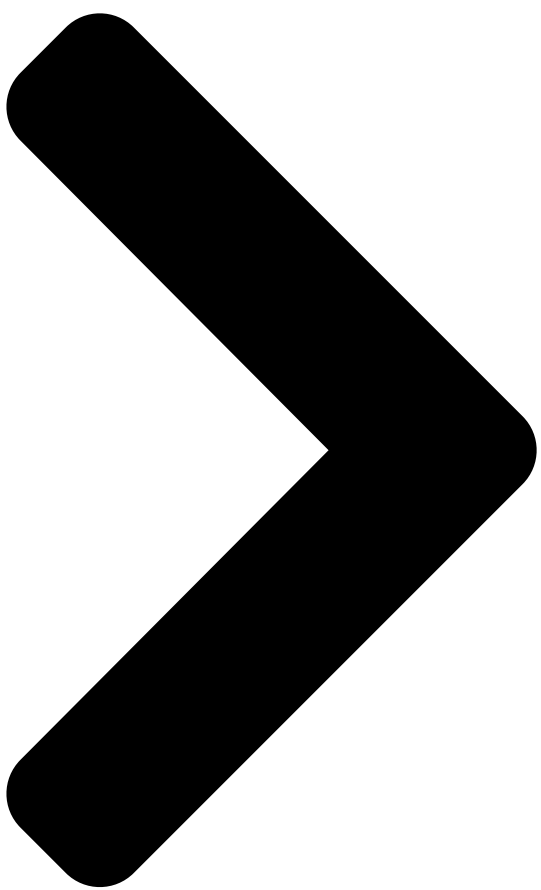

# TOSHIBA POS TERMINAL ST-B10 SERIES

## Quick Installation Manual

This sheet contains only the quick Installation procedures.  
Please be  
sure to read the Owner's Manual in the web site for further  
information  
about this POS terminal.



## Important Information to the User

In order to meet Product Safety and EMC legal Requirements, it is advised to socket

the power cord, and interface cable in accordance with the following instructions

Otherwise these devices need to meet following standards.

### Interface Cable

You are advised to use a shielded (360 degrees) interface cable with this product.

The shield must be connected to the frame or earth ground connection or earth

ground reference at BOTH ends of the cable.

If another cable is used than described above you will need to test this cable with the

TOSHIBA TEC POS terminal and your system for FCC and CE mark certification.

### Power Cord

For this product a UL listed, detachable power cord is required.

When the power

supply is mounted on the floor, a power cord with Type SJT marking is required.

Outside the US, power cords need to meet the particular country's certification and

application requirements. If a power cord is used different from described above you

might violate safety certifications, which are in force in the country of use.

### Caution

The socket-outlet needs to be installed near the equipment and must be easily accessible.

Do not connect the LAN cable wired outside of a building to the LAN port provided on

this product directly. The LAN port is intended for indoor connection.

If the product is connected to the LAN cable wired outside of a building, be sure to

use any communication equipment, such as a router, a hub, or a modem, which is

located within the same building as the product is installed.

## Note

The ST-B10 does not support the hot plug / hot unplug features of the Powered USB

interface. In case of plugging or unplugging the Powered USB peripherals attached to

the ST-B10, you are requested to power off the ST-B10.

[Next Page](#)

1  
2  
3  
4  
5

## Related Manuals for Toshiba ST-B10 SERIES

[Touch terminals Toshiba ST-B10 Series Maintenance Manual](#)

(126 pages)

[Touch terminals Toshiba ST-7000-C Series Owner's Manual](#)

Pos terminal (18 pages)

[Touch terminals Toshiba ST-A20 SERIES Owner's Manual](#)

Pos terminal (26 pages)

[Touch terminals Toshiba ST-71 SERIES Owner's Manual](#)

Pos terminal (25 pages)

[Touch terminals Toshiba ST-A10 SERIES Owner's Manual](#)

(24 pages)

[Touch terminals Toshiba ST-70 SERIES Owner's Manual](#)

Tec pos terminal (22 pages)

[Touch terminals Toshiba 4818-T10 Service Manual](#)

(22 pages)

[Touch terminals Toshiba 4818-T10 User Manual](#)

(42 pages)

[Touch terminals Toshiba 4818-ET1 User Manual](#)

(42 pages)

[Touch terminals Toshiba 4818-T10 Operating System Installation Manual](#)

(3 pages)

[Touch terminals Toshiba TFTST-76T-5A SERIES Owner's Manual](#)

Flat display unit (24 pages)

[Touch terminals Toshiba ST-7000 Series Owner's Manual](#)

Pos terminal (16 pages)

[Touch terminals Toshiba TEC POS ST-5600 Series Owner's Manual](#)

(22 pages)

## Summary of Contents for Toshiba ST-B10 SERIES

[Page 1](#) BOTH ends of the cable. If another cable is used than described above you will need to test this cable with the TOSHIBA TEC POS terminal and your system for FCC and CE mark certification. Power Cord For this product a UL listed, detachable power cord is required.

[Page 2](#) 1. APPEARANCE [Unit: mm] HDD Panel Power Switch er LED HDD LED Error LED...

[Page 3](#) (1) Power Switch This is the switch to turn the power of the POS terminal ON or OFF. The Power LED is illuminated when turning the power on. (2) Power LED (Blue) This is the LED to indicate the power ON/OFF status of the POS terminal. Blue LED is illuminated when turning the power ON.

[Page 4](#) 2. CONNECTORS CAUTION! The drawer interface connector is exclusively for connecting the drawer. Do not connect a phone line or any other cables than the drawer cable to this connector. Doing so may cause a failure of the phone line and this POS terminal. PS/2 (Mouse) Powered USB 12V PS/2 (Keyboard)

## [Page 5: Installation Procedure](#)

3. INSTALLATION PROCEDURE 3.1 Environment for Installation CAUTION! When installing the POS terminal, take the following precautions. Failure to do this may cause fire, electric shock, or injury. 1. Avoid locations where it is subject to the following: • Direct sunlight •...

## [Page 6: Connecting The Ac Plug](#)

1. Fully insert the Power Cord Plug into the AC Inlet. AC Inlet NOTE: The Power cord is not included in the carton. Please prepare it separately from local dealer. < For EU only > TOSHIBA TEC Europe Retail Information Copyright © 2010 by TOSHIBA TEC CORPORATION Systems S.A All Rights Reserved Rue de la Célidée 33 BE-1080 Brussels...