



Asus AAM6000UG-ALC Troubleshooting

Usb adsl modem

1
2

--


•

Bookmarks

--

[Download this manual](#)

Quick Links

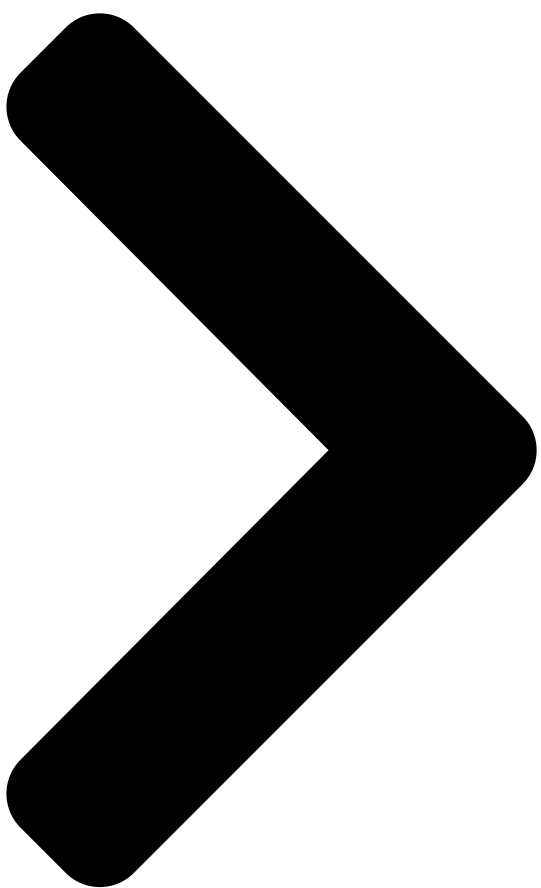

ASUS USB ADSL MODEM AAM6000UG - ALC

If your Internet connection is not working, the following hints may be helpful. After trying these hints, if you still cannot make your connection work, it is recommended that you ask your service provider for assistance.

DESCRIPTION

I cannot find the Shortcut to ADSL

USB Modem Connection on the desktop. What should I do?

TROUBLESHOOTING

Make sure the modem is plug in, then, follow these steps to create the shortcut-

<Windows 98/ME>

1.

On the desktop, select Start>Programs>Accessories>Communication >Dial-Up Networking

2.

Double click the Make New Connection icon.

3.

Click the Configure button. In Circuit Type, select Permanent Virtual Circuit with VPI: 8 and VCI: 35, click OK. When return to last screen, click Next.

4.

Fill in the phone number p8,35, click Next.

5.

When the Create Successfully screen appears, click Finish.

<Windows 2000>

1.

On the desktop, select Start>Programs>Accessories>Communication>Network and Dial-up Connections.

2.

Double click the Make New Connection icon.

3.

At the Network Connection Wizard, click Next.

4.

In Network Connection Type, select Dial-up to private network. Click Next.

5.

At the Select a Device screen, the correct modem is selected by default. Click Next

6.

Fill in the phone number p8,35, click Next.

7.

At the Connection Availability screen, the connection defaults to For all users. Click Next.

8.

When the Completing the Network Connection Wizard screen appears, click Finish.

<Windows XP>

1.

On the desktop, select Start>Programs>Accessories>Communication>New Connection Wizard

2.

At the Network Connection Wizard, click Next

3.

In Network Connection Type, select Connect to the Internet. Click Next.

4.

Select Set up my connection manually, click Next

5.

Select Connect using a dial-up modem, click Next

6.

At the Select a Device screen, the correct modem is selected by default. Click Next

7.

Type your ISP Name, click Next.

8.

Fill in the phone number p8,35, click Next.

9.

Type the user name and password provided by your ISP, click Next.

10. When the Completing the Network Connection Wizard screen appears, click Finish.

RECOMMENDED ACTION

[Next Page](#)

1
2

Related Manuals for Asus AAM6000UG-ALC

[Modem Asus AAM6000UG-ALC User Manual](#)

Usb adsl modem for belgacom (24 pages)

[Modem Asus AAM6000EV E User Manual](#)

Aam6000ev/e user's manual (20 pages)

[Modem Asus AAM6000EV User Manual](#)

Asustek computer user's manual adsl modem aam6000ev (32 pages)

[Modem Asus ACM6000EB User Manual](#)

Acm6000eb manual (16 pages)

[Modem Asus ACM6000EB User Manual](#)

(16 pages)

[Modem Asus AAM6000UG User Manual](#)

Usb adsl modem for software version 9.5 (26 pages)

[Modem Asus DSL-AC68U Quick Start Manual](#)

Dual-band 802.11ac vdsl/adsl modem router (108 pages)

[ASUS PCE-AX58BT - AX3000 Dual-Band PCIe Wi-Fi Adapter Quick Start](#)

(article)

[Modem Asus 4G-N16 Quick Start Manual](#)

Wireless-n300 lte modem router (148 pages)

[Modem Asus 4G-N16 Manual](#)

Wireless-n300 lte modem router (13 pages)

[Modem Asus CMAX6000 User Manual](#)

Wireless ax docsis 3.1 cable modem router (47 pages)

[Modem Asus 4G-AC68U Quick Start Manual](#)

Wireless-ac1900 lte modem router (51 pages)

[Modem Asus PCE-AC88 Quick Start Manual](#)

(2 pages)

[Modem Asus 4G-AC53U Quick Start Manual](#)

Wireless-ac750 lte modem router (44 pages)

[Modem Asus USB SpaceLink Client Quick Start Manual](#)

(6 pages)

[Modem Asus WL-600g Quick Start Manual](#)

All-in-1 wireless adsl2/2+ home gateway (227 pages)

Summary of Contents for Asus AAM6000UG-ALC

Page 1 ASUS USB ADSL MODEM AAM6000UG - ALC TROUBLESHOOTING If your Internet connection is not working, the following hints may be helpful. After trying these hints, if you still cannot make your connection work, it is recommended that you ask your service provider for assistance.

Page 2 The USB modem is not working. The First, please check if the driver is running properly. CSA icon remains black even after On the desktop, select, Start>Settings>Control Panel plugging in the USB modem. Double click the System icon, and select the option button Hardware>Devices Manager (In Windows 98/ME, we just need to click Devices Manager) Check if the "ADSL USB Modem"...